

Classic Lighting

Quality Products and Exceptional Service

Armeria LLC


ANTIQUE STYLE LAMP POSTS

Unique Two Piece Design

Fast and Easy Installation




Style No. PP3-2V4S12

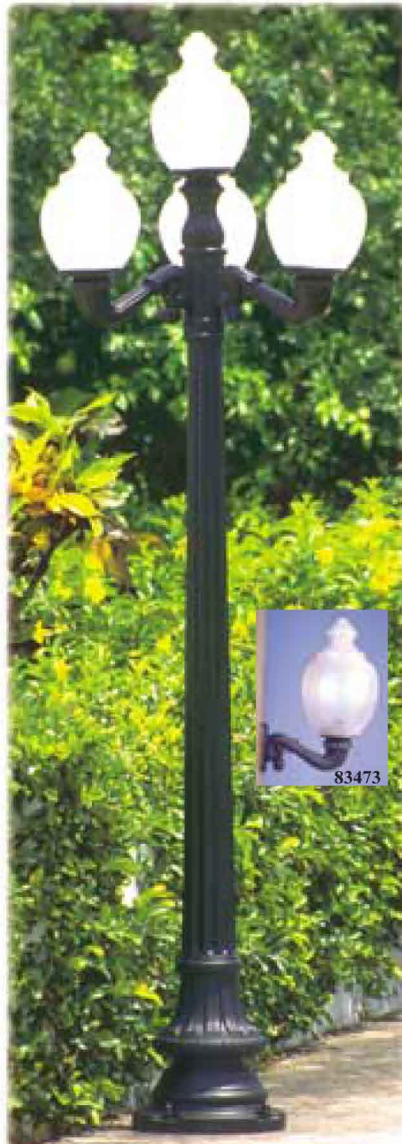

Style No. PP3-2V4A14

- **EASY INSTALLATION**

Two piece construction allows for easy transport and quick installation. Just mount the base to floor or deck. Run your wiring through the center tube. Then attach the shaft to the base with a twist! Each carton includes prewired incandescent fitters, template and mounting bolts.



- **SUPERIOR MATERIAL**

Patented polysteel® post provides the structural benefits of steel with the low maintenance and durability of industrial outdoor polymer.



- **LOW MAINTENANCE/
CORROSION RESISTANT**

Polyethylene construction resistant to environmental aging and severe temperature changes.

- **VANDAL RESISTANT**

Tough polyethylene globes are virtually indestructible.

- **AFFORDABLE**

There has never been a product in this price range with this appearance and quality.

- **SECURITY & ELEGANCE**

Increase safety and provide an elegant appearance to the home and yard. Can be installed on outdoor decks. Post available in black, green, sandstone, or white.

Armeria LLC

**890 W. 23rd Street
San Pedro, CA 90731**

T: 323.522.4156

F: 310.832.2026

E: info@armeria.us

Products are manufactured in the U.S.A

Rotonics Classic Lamp Post and Luminaire Mounting and Assembly Instructions

To assure safety, turn off electrical while installing this unit.

Lamp Post Installation


Hardware included:

- | | |
|------------------|---------------------------|
| 4 - anchor bolts | 4 - decorative nut covers |
| 4 - washers | 1 - foundation template |
| 4 - nuts | |

1. Recommendations for Preparing the


Foundation: (Template included)

- The foundation size must be at least 15" in diameter and approximately 15" deep. Consult the local electrical code for wiring type and required foundation depth.
- Bolt height should be approximately 2" above the surface of the foundation. The bolt hole center line is 13". (Figure #1)
- Run underground wire inside conduit to power source. Installation wires must be 6" longer than pole height.




2. Attaching Post Shaft to Post Base:

- Run electrical wires through the galvanized steel post located in the center of the base all the way up through the post, leaving approximately 6" of wire at the top of the post to attach the fitter.
- Locate the post shaft over the tube in the base and line up the dimple inside the post shaft with the channel indentation in the base post tube. Slide the post over the base tube and twist the post shaft, locking the post into place. (Figure #2)




3. Attaching Post Base to Foundation:

- Place the base over the anchor bolts, securing it to the foundation with the washers and nuts. (Figure #3)
- Cover nuts with decorative plastic covers. (Figure #4)



4 Arm Installation (3-wire nuts not included)

Place 4 Arm Fixture near the post top making sure that the wiring from the 4 globes and the wiring which runs through the post are pulled out the openings. Use a wire nut, connect the green ground wire from the 4 Arm Fixture to the grounding conductor from the power source, twist together all 4 white wires from the individual lamps and the white wire from the power source, twist together all 4 black wires from the individual lamps and the black wire from the power source. **MAKE SURE WIRE NUTS ARE SECURELY FASTENED AND THAT NO BARE WIRE IS EXPOSED.** Secure 4 Arm Fixture to the post with the set screws provided. (Figure #5)

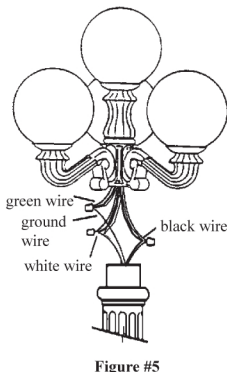

Non-Necked Globes

Hardware included:




- 3 - 1/4" - 20 x 3/4" self tapping screws
- 2 - 1 1/4" #6 counter sunk screws
- 2 - anchor plates
- 2 - coil springs

Note: 4-maximum 150 watt light bulbs not included.

Assembly Instructions:

- Insert fitter (part #75710) over adapter. Insert three 1/4" - 20 x 3/4" self-tapping screws through fitter and adapter into the pole. (Figure #6)
- Mount two anchor plates (ribbed side down) by placing the two 1-1/4" #6 counter sunk screws through the two coil springs (which are placed between the anchor plates and the fitter). (Figure #7)
- Place the lip of the globe under one clamp and rotate around under the other clamp. Once the globe is under both clamps, adjust the globe to the center and tighten the clamps securely. (Figure #8)

1/4" - 20 x 3/4" self tapping screws



Necked Globes



Hardware included:

- 6 - 1/4" - 20 x 3/4" self tapping screws

Note: Maximum 150 watt light bulb not included.

Assembly Instructions:

- Insert fitter (part #75720) over adapter. Insert three 1/4" - 20 x 3/4" self-tapping screws through fitter and adapter into the pole. (Figure #9)
- Place the globe into the fitter, and secure it by hand tightening three 1/4" - 20 x 3/4" self-tapping screws into the holes over the lip of the globe. (Figure #10)



Warranty

Two year material & workmanship.
Review written limited warranty for details.

Armeria LLC
890 W. 23rd St.
San Pedro, CA 90731
323.522.4156
info@armeria.us

www.armeria.us